

# HVA34

## VLF high voltage test set

### Datasheet



The HVA34 is a perfectly suitable test set to determine the condition of medium voltage cables with a voltage rating up to 25 kV (acc. to IEEE 400.2-2013). Its compact design and unmatched high voltage output power to weight ratio is second to none on the market and makes it an excellent option for cable testing up to 24 kV<sub>rms</sub> and 34 kV<sub>peak</sub> (sine wave operation). Beside the VLF and DC testing, the HVA34 performs also sheath testing with sheath fault location mode (here, however, additional fault probe is needed).

**Performance:** Outstanding features considering size and weight vs. output load.

**Duty cycle:** No thermal limitation! You can use the test set continuously.

**Safety first:** Two independent discharge devices (electronic and mechanical discharging) and an integrated 12 kV backfeed protection system (at 50/60 Hz).

**Connectivity:** On-site, no external PC is needed. All results can be later downloaded via USB for further investigation and easy reporting via the b2 ControlCenter.

**Solid HV connectors:** Robust HV connectors allow the use of various HV test lead lengths, quick exchange through a replacement cable, or a simpler upgrade path for connection of diagnostics systems.



Output voltage	max. 34 kV <sub>peak</sub> , 24 kV <sub>rms</sub>
Output load	0.4 μF @ 0.1 Hz @ 24 kV <sub>rms</sub>
Weight	19.5 kg / 43 lbs

## YOUR BENEFITS



### UNLIMITED OPERATING TIME

HVA generators are designed for continuous operation without any thermal limitations.



### DRY SYSTEM

HVA test sets are constructed with non-arcing contacts and no need to change oil. This eliminates routine servicing and makes the test sets almost maintenance-free.



### COMPACT AND PORTABLE

Our HVA series have been designed for maximum portability and on-site use. It makes them widely applicable for in-field use.



### TD AND PD DIAGNOSTICS

HVA34 can be extended to a complete cable diagnostic system at any time.

- Pure sinusoidal output voltage (load-independent)
- Sheath fault pinpointing in combination with sheath fault locator (not included)
- Easily exchangeable HV test lead

- Breakdown voltage and load detection
- Real time oscilloscope of the output voltage on the HVA display
- Programmable test sequences with a tailor-made software tool
- Report downloads from the device via USB flash drive

# HVA34 VLF high voltage test set


Datasheet



## TECHNICAL DATA

Output characteristics	
VLF sine wave	0 ... 24 kV <sub>rms</sub> / 0 ... 34 kV <sub>peak</sub>
DC	-34 kV ... 34 kV
VLF square wave	0 ... 34 kV
<b>Output voltage</b>	
Sheath test	0 ... 10 kV (negative polarity)
Voltage setting resolution	0.1 kV
AC frequency range	0.01 Hz ... 0.1 Hz
Frequency setting resolution	0.01 Hz
<b>Output current</b>	
AC	10 mA <sub>rms</sub> max.
DC	14 mA max.
Sheath test trip current	0.1 ... 5 mA
Sheath fault location	17 mA max.
<b>Duty cycle</b>	Continuous, no thermal limitation of operating time

### Load diagram for sine wave

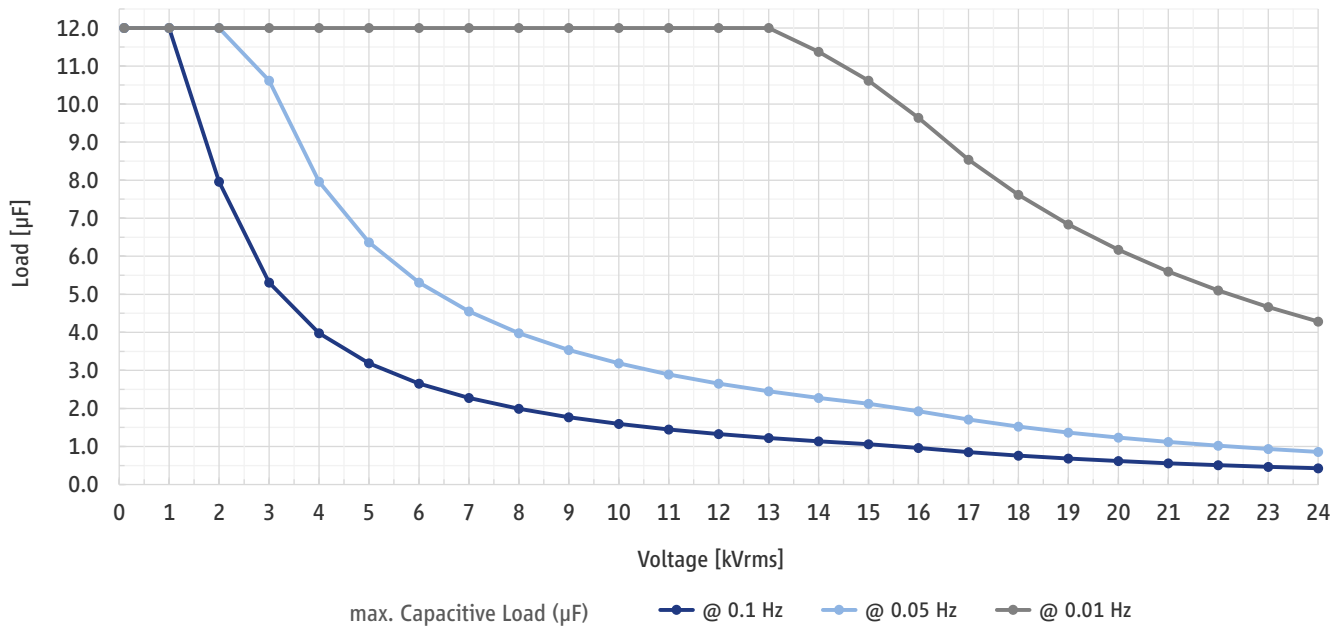

High voltage tests		
<b>Test types</b>	VLF withstand test	
	DC test	
	Sheath test	
	Sheath fault location	pulse / period: 1:3 / 4s, 1:5 / 4s, 1:5 / 6s, 1:9 / 6s (sheath fault locator not in scope of supply)
	Vacuum bottle test	

# HVA34

## VLF high voltage test set

### Datasheet



High voltage tests (continued)	
<b>Test modes</b>	Manual mode Automatic test sequences (user definable)
<b>Arc management modes</b>	Burn on arc Trip out on arc
<b>Compliance</b>	VLF withstand testing according to IEEE 400.2 and the test standards DIN VDE 0276-620 (CENELEC HD 620 S2), DIN VDE 0276-621 (CENELEC HD 621 S1) AC and sheath testing according to IEC 60502-2 / IEC 60229

Metering		
<b>Output voltage measurement range</b>	AC TrueRMS	
	Maximum display value	35 kV <sub>rms</sub>
	Resolution	0.1 kV <sub>rms</sub>
	Accuracy	± 0.1 kV <sub>rms</sub> ± 1% of reading
	DC	
	Maximum display value	50 kV
	Resolution	0.1 kV
	Accuracy	± 0.1 kV ± 1% of reading
<b>Output current measurement range</b>	AC TrueRMS	
	Maximum display value	17 mA <sub>rms</sub>
	Resolution	0.1 / 1 / 10 / 100 μA <sub>rms</sub>
	Accuracy	± 1 μA <sub>rms</sub> ± 1% of reading
	DC	
	Max./min. display values	± 25 mA
	Resolution	0.1 / 1 / 10 / 100 μA
	Accuracy	± 1 μA ± 1% of reading
<b>Resistance</b>	Range	0.1 MΩ ... 5 GΩ
	Resolution	0.1 / 1 / 10 / 100 MΩ
	Accuracy	typ. 10%
<b>Capacitance</b>	Range	0 ... 20 μF
	Resolution	0.01 / 0.1 / 1 nF and 0.01 / 0.1 μF
	Accuracy	typ. 20%
<b>Flashover voltage</b>	Full output voltage range	

Further characteristics		
<b>AC supply</b>	110 ... 240 V, 50/60 Hz, 400 VA	
<b>Product safety</b>	Backfeed protection: 12 kV at 50/60 Hz	
	DDD Dual Discharge Device (integrated electronic and mechanical discharge device)	
<b>Environmental conditions</b>	Operating temperature range	-10 ... +50 °C
	Storage temperature range	-25 ... +70 °C
	Humidity	5 ... 85%, non condensing

# HVA34 VLF high voltage test set

## Datasheet




Further characteristics	
<b>Data transfer</b>	USB type A
	RS232
<b>Report management</b>	Built-in memory: up to 50 reports, 40 test sequences
	USB flash drive: dependent on storage capacity
<b>PC software</b>	b2 ControlCenter (included)
	HVA ControlCenter (included)
<b>Dimensions L x W x H</b>	430 x 250 x 360 mm 17 x 9.8 x 14.17 in
<b>Weight</b>	19.5 kg / 43 lbs

## SCOPE OF SUPPLY

	Art. No.
HVA34 VLF High Voltage Test Set	SH5006
Included accessories	Pcs. Art. No.
HVA34 HV test lead 65 kV 4 m with 80 A clamp	1 GH0570
Earth lead 4 m 6 mm <sup>2</sup> transparent M6/clamp	1 GH0522
Earth lead 4 m 6 mm <sup>2</sup> yellow/green M6/M6	1 KEK0076
Power chord country specific - Unit side C13	1 XKEK0001
HVA language specific manual	1 XDHV0005
HVA safety instructions multi language	1 DHV1440
HVA 1st generation data storage device with PC software	1 GZD5026
Extra Power-on key	1 KEC0007
Cable serial DB9 f/f Link 3 m	1 KEK0017
UC232R-10 "ChiPi" USB-RS232 Adapter	1 KEK0049

## OPTIONALLY AVAILABLE

Additional Accessories	Art. No.	Diagnostics Options	Art. No.
Discharge Stick 30 kV 6 kΩ 4 kJ 750 mm	GH0628	TD30 Tan Delta diagnostics system	SH5021
Transport case	VKR0002	PD30-E Partial Discharge diagnostics system	SH5027
 <p>GH0628</p> <p>VKR0002</p>		 <p>TD30</p> <p>PD30-E</p>	