HVA68-2
VLF high voltage test set

Datasheet

The HVA68-2 is a member of the HVA series with extra power, with an output current up to 88 mA. This extends greatly the maximum load and therefore the testable length of a cable. It is a compact and portable VLF test set for assessing the condition of medium-voltage cables up to 35 kV (in accordance with IEEE 400.2). In addition to VLF testing (sine and square wave) and DC testing, the HVA68-2 also supports sheath testing and sheath fault location*.

Extra power: Outstanding performance considering size and weight vs. output load. Devices under test up to 7 km in length** can be tested at 48 kV_{rms} with 0.1 Hz.

Connectivity: On-site, no laptop is required. All results can be later downloaded via USB for further analysis and easy reporting using the b2 ControlCenter.

Safety first: Two simultaneous ways of discharging (electronic and mechanical) plus integrated 12 kV backfeed protection (at 50/60 Hz) ensure maximum operator safety.

Flexible connection options: Robust HV connectors allow use of various HV test lead lengths, quick replacement, and easy upgrades for diagnostic system integration.

Output voltage	max. 68 kV_{peak}, 48 kV_{rms}
Output load	1.7 µF @ 0.1 Hz @ 48 kV_{rms}
Weight	57 kg | 125.6 lbs

YOUR BENEFITS

UNLIMITED OPERATING TIME
HVA test sets are designed for continuous operation within the specifications.

DRY SYSTEM
HVA test sets are constructed with non-arcing contacts and no need to change oil. This eliminates routine servicing and makes the test sets almost maintenance-free.

COMPACT AND PORTABLE
Our HVA test sets are designed for maximum portability, resulting in widely applicable devices for any type of on-site use.

TRUE MODULARITY
All our HVA test sets can be easily extended to a complete diagnostics system by adding our PD, TD or PDTD series products at a later point of time. This keeps the initial investment low.

- Pure sinusoidal output voltage (load-independent) over the entire power range
- Easily exchangeable HV test lead
- Breakdown voltage and load detection
- Real time oscilloscope of the output voltage on the HVA display
- Programmable test sequences with a tailor-made software tool

*additional sheath fault locator needed
**at 250 pF/m cable capacitance and 1.7 µF load

DHV1451 Rev01 – © b2 electronics GmbH – Subject to change without notice.

HVA68-2
VLF high voltage test set

Datasheet

TECHNICAL DATA

Output characteristics		
Output voltage	VLF sine wave	0 ... 68 kV_{peak} | 0 ... 48 kV_{rms}
	DC	-65 kV ... 65 kV
	VLF square wave	0 ... 60 kV
	Sheath test	0 ... 10 kV (negative polarity)
	Voltage setting resolution	0.1 kV
	AC frequency range	0.01 Hz ... 0.1 Hz
	Frequency setting resolution	0.01 Hz
Output current	AC	56 mA_{rms} max.
	DC	88 mA max.
	Sheath test trip current	0.1 ... 5 mA
	Sheath fault location	35 mA max.
Duty cycle		Continuous, no thermal limitation of operating time

Load diagram for sine wave

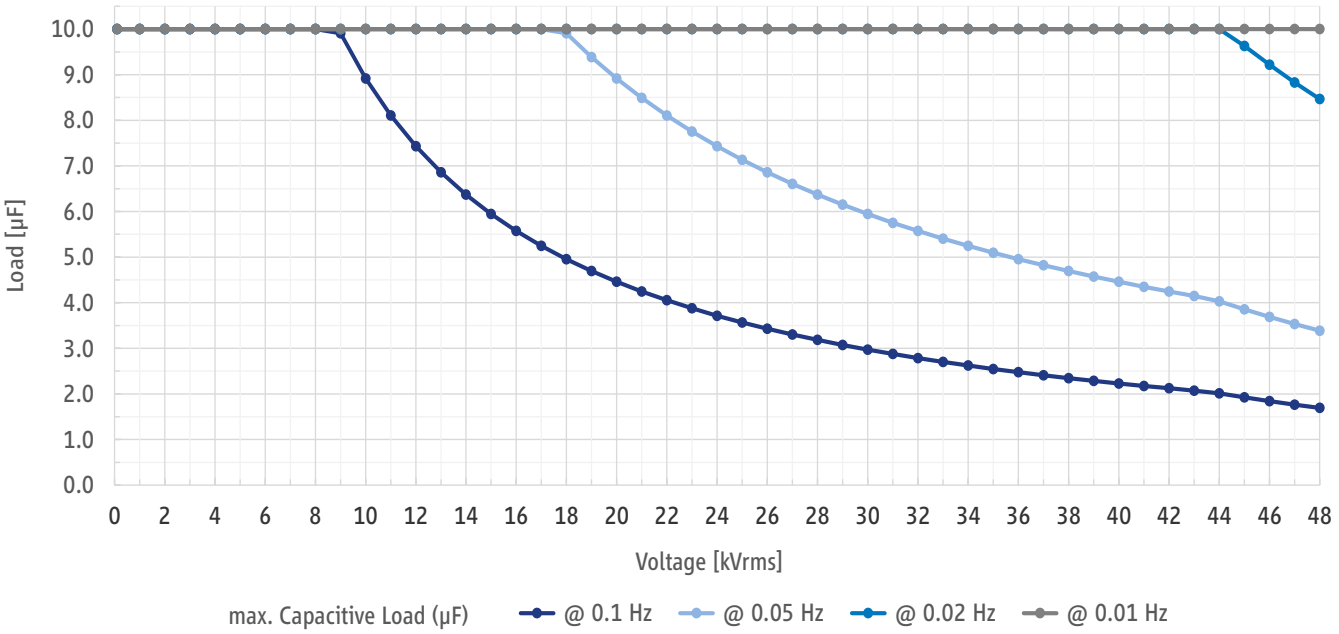

High voltage tests		
Test types	VLF withstand test	
	DC test	
	Sheath test	
	Sheath fault location	pulse / period: 1:3 / 4s, 1:5 / 4s, 1:5 / 6s, 1:9 / 6s
		(additional sheath fault locator needed)
	Vacuum bottle test	

DHV1451 Rev01 – © b2 electronics GmbH – Subject to change without notice.

HVA68-2
VLF high voltage test set

Datasheet

High voltage tests (continued)	
Test modes	Manual mode Automatic test sequences (user definable)
Arc management modes	Burn on arc
	Trip out on arc
Compliance	VLF withstand testing according to IEEE 400.2 and the test standards DIN VDE 0276-620 (CENELEC HD 620 S2), DIN VDE 0276-621 (CENELEC HD 621 S1)
	AC and sheath testing according to IEC 60502-2 / IEC 60229

Metering		
Output voltage measurement range	AC TrueRMS	
	Maximum display value	53 kV_{rms}
	Resolution	0.1 kV_{rms}
	Accuracy	± 0.1 kV_{rms} ± 1% of reading
	DC	
	Maximum display value	75 kV
	Resolution	0.1 kV
	Accuracy	± 0.1 kV ± 1% of reading
Output current measurement range	AC TrueRMS	
	Maximum display value	70 mA_{rms}
	Resolution	0.1 / 1 / 10 / 100 μA_{rms}
	Accuracy	± 1 μA_{rms} ± 1% of reading
	DC	
	Max./min. display values	± 100 mA
	Resolution	0.1 / 1 / 10 / 100 µA
	Accuracy	± 1 µA ± 1% of reading
Resistance	Range	0.1 MΩ ... 5 GΩ
	Resolution	0.1 / 1 / 10 / 100 MΩ
	Accuracy	typ. 10%
Capacitance	Range	0 ... 30 µF
	Resolution	0.01 / 0.1 / 1 nF and 0.01 / 0.1 µF
	Accuracy	typ. 20%
Flashover voltage		Full output voltage range

Further characteristics		
AC supply		190 ... 240 V, 50/60 Hz, 3.000 VA
Product safety		Backfeed protection: 12 kV at 50/60 Hz
		DDD Dual Discharge Device (integrated electronic and mechanical discharging)
		Connector for external interlock
		Key switch (protection against unauthorized use)
Environmental conditions	Operating temp. range	-10 ... +50 °C | 14 ... 122 °F
	Storage temp. range	-25 ... +70 °C | -13 ... 158 °F
	Humidity	5 ... 85%, non condensing

DHV1451 Rev01 – © b2 electronics GmbH – Subject to change without notice.

HVA68-2
VLF high voltage test set

Datasheet

Further characteristics	
Data transfer	USB type A
	RS232
Report management	Built-in memory: up to 50 reports, 40 test sequences
	USB drive: dependent on storage capacity
PC software	b2 ControlCenter (included)
	HVA ControlCenter (included)
Dimensions L x W x H	450 mm x 340 mm x 520 mm | 17.7 in x 13.4 in x 20.47 in
Weight	57 kg | 125.6 lbs

SCOPE OF SUPPLY

	Art. No.
HVA68-2 VLF high voltage test set	SH5016

Included accessories	Pcs.	Art. No.
HVA68-2 HV test lead 5 m MC14	1	GH0653
Grounding cable 6 mm² 4 m M6/clamp transparent	1	GH0522
Spare key for key-lock switch Rafix 16	1	KEC0007
Cable serial DB9 f/f 3 m	1	KEK0017
USB to RS232 cable UC232R-10 FTDI Chip	1	KEK0049
Power cord country-specific with C19 connector	1	XKEK0002
PC software & corresponding HVA documentation on a USB drive	1	GZD5026
b2 Safety instructions for HVA series multi language	1	DHV1440

OPTIONALLY AVAILABLE

Additional accessories	Art. No.	Suggested diagnostics options	Art. No.
Discharge stick 60 kV 12 kΩ 8 kJ 1.100 mm	GH0629	PDTD68 VLF diagnostics system	SH5060
Flight case with wheels	VKR0071	TD60-MC Tan Delta diagnostics system	SH5023

GH0629

VKR0071

PDTD68

TD60-MC

DHV1451 Rev01 – © b2 electronics GmbH – Subject to change without notice.