

HVA68-2

VLF high voltage test set

Datasheet



The HVA68-2 is a truly compact and portable VLF test set which determines the condition of medium voltage cables. It performs VLF and DC testing, as well as sheath testing with sheath fault location mode (additional fault probe needed). It is also an HVA series member with a very high output current, up to 88 mA, extending greatly the load possibilities and testable length of a cable.

Performance: 2.1 μF @ 0.1 Hz @ 43 kV_{rms} compared to 1.0 μF @ 0.1 Hz @ 43 kV_{rms} (HVA60). That makes double the output power with no increase in size or weight. b2 electronics patented technology with pure sinusoidal VLF output voltage makes this device the most advanced and powerful HV device for cable testing.

Safety first: Two independent discharge devices (electronic and mechanical discharging) and an integrated 12 kV backfeed protection system (at 50/60 Hz).

Duty cycle: No thermal limitation! You can use the test set continuously.

Connectivity: On-site, no external PC is needed. All results can be later downloaded via USB for further investigation and easy reporting via the b2 ControlCenter.

Solid HV connectors: Robust HV connectors allow use of various HV test lead lengths, quick exchange through a replacement cable, or a simpler upgrade path for connection of diagnostics systems.



Output voltage	max. 68 kV_{peak} , 48 kV_{rms}
Output load	1.7 μF @ 0.1 Hz @ 48 kV_{rms}
Weight	57 kg / 125.6 lbs

YOUR BENEFITS



TD AND PD DIAGNOSTICS
HVA68-2 can be extended to a complete cable diagnostic system at any time.



DRY SYSTEM
HVA test sets are constructed with non-arcing contacts and no need to change oil. This eliminates routine servicing and makes the test sets almost maintenance-free.



UNLIMITED OPERATING TIME
HVA generators are designed for continuous operation without any thermal limitations.



COMPACT AND PORTABLE
Our HVA series have been designed for maximum portability and on-site use. It makes them widely applicable for in-field use.

- Pure sinusoidal output voltage (load-independent)
- Sheath fault pinpointing in combination with sheath fault locator (not included)
- Easily exchangeable HV test lead
- Breakdown voltage and load detection
- Real time oscilloscope of the output voltage on the HVA display
- Programmable test sequences with a tailor-made software tool
- Report downloads from the device via USB flash drive

HVA68-2

VLF high voltage test set


Datasheet



TECHNICAL DATA

Output characteristics	
VLF sine wave	0 ... 48 kV _{rms} / 0 ... 68 kV _{peak}
DC	-65 kV ... 65 kV
VLF square wave	0 ... 60 kV
Output voltage	
Sheath test	0 ... 10 kV (negative polarity)
Voltage setting resolution	0.1 kV
AC frequency range	0.01 Hz ... 0.1 Hz
Frequency setting resolution	0.01 Hz
Output current	
AC	56 mA _{rms} max.
DC	88 mA max.
Sheath test trip current	0.1 ... 5 mA
Sheath fault location	35 mA max.
Duty cycle	Continuous, no thermal limitation of operating time

Load diagram for sine wave

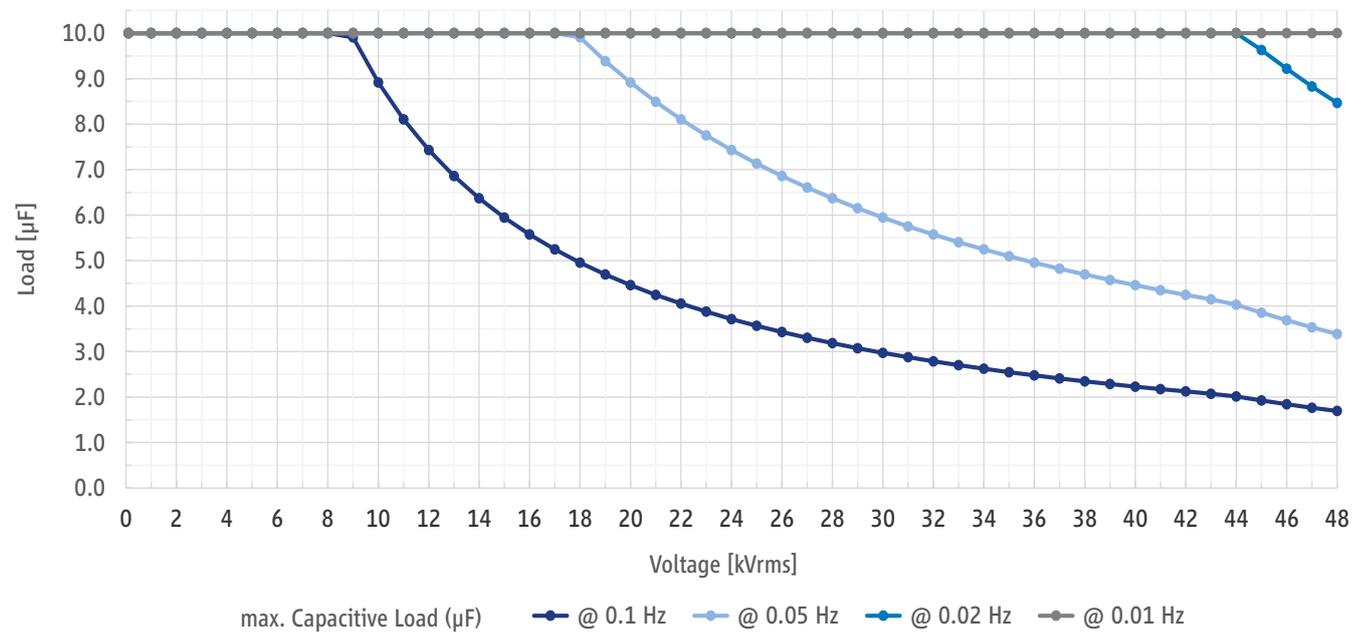

High voltage tests		
Test types	VLF withstand test	
	DC test	
	Sheath test	
	Sheath fault location	pulse / period: 1:3 / 4s, 1:5 / 4s, 1:5 / 6s, 1:9 / 6s (sheath fault locator not in scope of supply)
	Vacuum bottle test	

DHV1451 Rev00 – © b2 electronics GmbH – Subject to change without notice.

HVA68-2

VLF high voltage test set

Datasheet



High voltage tests (continued)	
Test modes	Manual mode Automatic test sequences (user definable)
Arc management modes	Burn on arc Trip out on arc
Compliance	VLF withstand testing according to IEEE 400.2 and the test standards DIN VDE 0276-620 (CENELEC HD 620 S2), DIN VDE 0276-621 (CENELEC HD 621 S1) AC and sheath testing according to IEC 60502-2 / IEC 60229

Metering		
Output voltage measurement range	AC TrueRMS	
	Maximum display value	53 kV _{rms}
	Resolution	0.1 kV _{rms}
	Accuracy	± 0.1 kV _{rms} ± 1% of reading
	DC	
	Maximum display value	75 kV
	Resolution	0.1 kV
	Accuracy	± 0.1 kV ± 1% of reading
Output current measurement range	AC TrueRMS	
	Maximum display value	70 mA _{rms}
	Resolution	0.1 / 1 / 10 / 100 μA _{rms}
	Accuracy	± 1 μA _{rms} ± 1% of reading
	DC	
	Max./min. display values	± 100 mA
	Resolution	0.1 / 1 / 10 / 100 μA
	Accuracy	± 1 μA ± 1% of reading
Resistance	Range	0.1 MΩ ... 5 GΩ
	Resolution	0.1 / 1 / 10 / 100 MΩ
	Accuracy	typ. 10%
Capacitance	Range	0 ... 30 μF
	Resolution	0.01 / 0.1 / 1 nF and 0.01 / 0.1 μF
	Accuracy	typ. 20%
Flashover voltage	Full output voltage range	

Further characteristics		
AC supply	190 ... 240 V, 50/60 Hz, 3.000 VA	
Product safety	Backfeed protection: 12 kV at 50/60 Hz	
	DDD Dual Discharge Device (integrated electronic and mechanical discharge device)	
Environmental conditions	Operating temperature range	-10 ... +50 °C
	Storage temperature range	-25 ... +70 °C
	Humidity	5 ... 85%, non condensing

HVA68-2 VLF high voltage test set

Datasheet



Further characteristics	
Data transfer	USB type A
	RS232
Report management	Built-in memory: up to 50 reports, 40 test sequences
	USB flash drive: dependent on storage capacity
PC software	b2 ControlCenter (included)
	HVA ControlCenter (included)
Dimensions L x W x H	450 x 340 x 520 mm 17.7 x 13.4 x 20.47 in
Weight	57 kg / 125.6 lbs

SCOPE OF SUPPLY

	Art. No.
HVA68-2 VLF High Voltage Test Set	SH5016
Included accessories	Pcs. Art. No.
HVA68-2 HV test lead 100 kV 5 m MC14	1 GH0653
Earth lead 4 m 6 mm ² transparent M6/clamp	1 GH0522
Power chord country specific - Unit side C19	1 XKEK0002
HVA language specific manual	1 XDHV0005
HVA safety instructions multi language	1 DHV1440
HVA 1st generation data storage device with PC software	1 GZD5026
Extra Power-on key	1 KEC0007
Cable serial DB9 f/f Link 3 m	1 KEK0017
UC232R-10 "ChiPi" USB-RS232 Adapter	1 KEK0049

OPTIONALLY AVAILABLE

Additional Accessories	Art. No.	Diagnostics Options	Art. No.
Discharge Stick 60 kV 12 kΩ 8 kJ 1100 mm	GH0629	TD60-MC Tan Delta diagnostics system	SH5023
Transport case with wheels	VKR0009	PDTD60-2 PD & TD diagnostics system	SH5031



VKR0009

GH0629



TD60-MC



PDTD60-2